




**COOLER & FREEZER
GLASS DOOR CATALOG**

INDEX

Index	- 1 -
Company Overview	- 2 -
Display Glass Doors	- 3 -
Entrance Glass Doors	- 4 -
French Display Glass Doors.....	- 5 -
Windows and Frames	- 6 -
Standard Features	- 7 -
Shelving	- 8 -
Rough Opening Guide	- 9 -
Rough Opening Guide (Cont.)	- 10 -
Retrofit Glass Doors	- 11 -
Gallery	- 12 -
Gallery (Cont.)	- 13 -
Glass Specifications	- 14 -

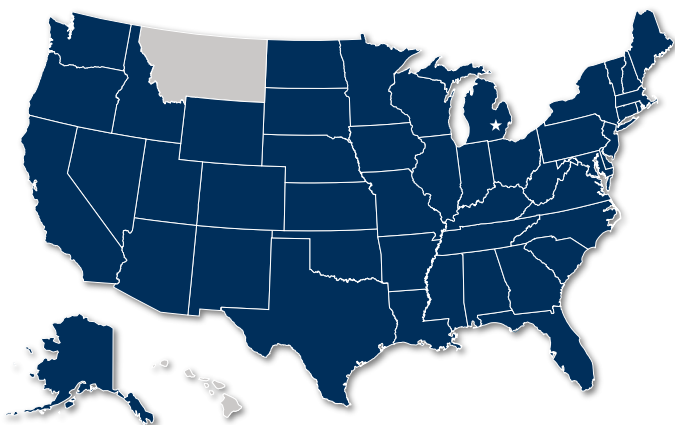

WE ARE PROUD TO HAVE OUR DOORS INSTALLED IN 48 STATES AND COUNTING!

COMPANY OVERVIEW

We Specialize in Glass Doors

Raves Cooler Doors manufactures and assembles cooler and freezer glass doors out of superior, high-quality products for the commercial refrigeration industry. Raves Cooler Doors combine innovative design and advanced technology to create refrigerated display systems that maintain product visibility in all proper operating environments, while remaining energy efficient. This booklet contains the different style options available and standard features for each glass door.

Styles and features may vary.



Visit an Install Location Near You!

ravescoolerdoors.com/locations

Or Visit Our Showroom!

1704 E Highland Rd
Highland, MI 48356



energy
efficient



LED
lighting



easy
quick connect



heated frame
technology



anti-sweat
control



LOCAL NUMBER
248.887.0648

CALL US TOLL FREE
844.261.7252

DISPLAY GLASS DOORS



Standard Display Glass Doors

Applications:

- Cooler and Freezer

Available Sizes:

- 30" x 80"
- 24" x 73"

Standard Features:

- 3 Pane Non-Heated Tempered Glass (Cooler)
- 3 Pane Heated Tempered Glass (Freezer)
- Super Clear Glass
- Full Length Handle
- Double-Sided LED Lighting
- Seven (7) 27" Deep Black Shelves Per Door
- Heated Frames with Anti-Sweat Sensor
- Magnetic Gasket Seal
- Easy Quick Connect
- Automatic Hold Open
- Reversible Door Swings
- DOE 2017 Compliant



ENTRANCE GLASS DOORS

Standard Entrance Glass Doors

Applications:


- Cooler

Available Sizes:

- 36" x 80"
- 30" x 80"
- 36" x 84" (also available as a Double Beer Cave)

Standard Features:


- ADA Complaint (36" Wide Doors)
- 3 Pane Non-Heated Tempered Glass (Cooler)
- Super Clear Glass
- Double-Sided LED Lighting
- Heated Frames with Anti-Sweat Sensor
- Heavy Duty Kick Plate and Double Push-Bars
- Flat Threshold
- Magnetic Gasket Seal
- Easy Quick Connect
- Automatic Hold Open
- Reversible Door Swings
- DOE 2017 Compliant

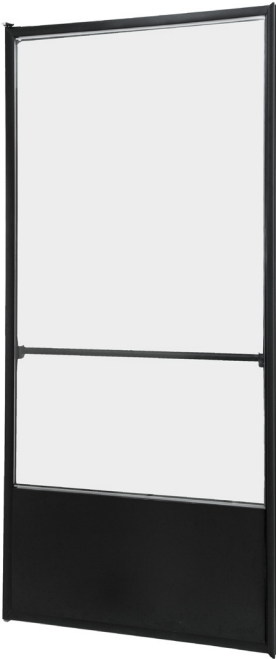

LOCAL NUMBER
248.887.0648

CALL US TOLL FREE
844.261.7252

FRENCH DISPLAY GLASS DOORS

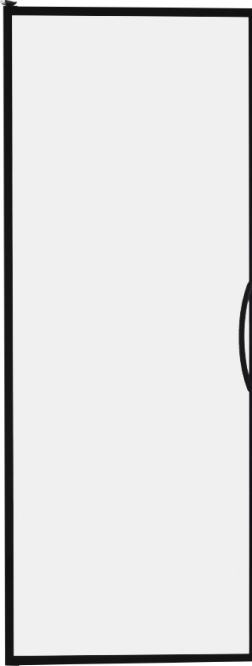

Contour Display Glass Doors

Applications:

- Cooler

Available Sizes:

- 30" x 80"

Standard Features:

- 3 Pane Non-Heated Tempered Glass (Cooler)
- Super Clear Glass
- French Style Door Openings
- Curved Handle
- Double-Sided LED Lighting
- Six (6) 60" x 24" Deep Black Shelves Per Door
- Heated Frames with Anti-Sweat Sensor
- Magnetic Gasket Seal
- Easy Quick Connect
- Automatic Hold Open
- DOE 2017 Compliant



WINDOWS AND FRAMES


Beer Cave Display Windows




12" Cave
Display Window



18" Cave
Display Window



24" Cave
Display Window

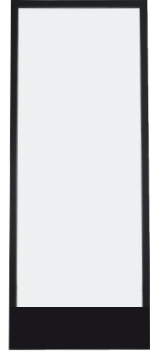

30" Cave
Display Window

Frame Details


All frames are pre-wired for frame heat, and have LED lights pre-mounted for easy installation. Frames have excellent insulation value and each frame has a pre-installed anti-sweat sensor which controls the frame heat by measuring the relative humidity of the area outside of the cooler or freezer. This ensures that the frames stay condensation free while remaining energy efficient.



LOCAL NUMBER
248.887.0648

CALL US TOLL FREE
844.261.7252

STANDARD FEATURES



LED Lighting

Energy saving LED lights are installed on door frames to provide excellent lighting to ensure maximum product visibility and energy efficiency. Available with clear or frosted lenses.

Quick Connect

The patented quick connect provides hassle free installation, simply align, click, secure, and connect.



Anti-Sweat Sensor

Anti-Sweat Sensors are built into every frame measuring temperature and dew point. Using this information the sensor controls the frame heaters to keep frames condensation free. Comes standard with all frames.

Magnetic Gasket

Durable double tier magnetic gasket seal ensures a secure connection between the door and frame; saving energy costs. The magnet along the perimeter also doubles as a warm edge spacer to improve thermal efficiency by minimizing air loss.




Full Length Handle

Our display glass doors come standard with a full length handle that is extruded as one piece as part of the door rail for an extremely durable, minimal, and low profile design.

Shelving System

Durable coated black 27" deep shelving comes standard with each and every display door, also available in a push cart for pass through doors. Shelving is easy to assemble and secures directly to the frame for extra stability. Optional 24" or 36" deep shelving is available upon request.

Shelf



Post



Post-Holder



Spreader



Spacer



Price-Tag Holder



ROUGH OPENING GUIDE

30" x 80" COOLER & FREEZER DOOR ROUGH OPENINGS

(FRAMES HAVE A 5/8" FLANGE ON ALL 4 SIDES, RECOMMENDED 4" TO 6" SILL / BASE)

# OF DOORS	RO WIDTH (IN)	RO WIDTH (FT / IN)	RO HEIGHT (IN)
1	32-1/8"	2' 8-1/8"	82-1/4"
2	62-5/8"	5' 2-5/8"	82-1/4"
3	93"	7' 9"	82-1/4"
4	123-3/8"	10' 3-3/8"	82-1/4"
5	156-5/8"	13' 0-5/8"	82-1/4"
6	187"	15' 7"	82-1/4"
7	217-3/8"	18' 1-3/8"	82-1/4"
8	247-3/4"	20' 7-3/4"	82-1/4"
9	281"	23' 5"	82-1/4"
10	311-3/8"	25' 11-3/8"	82-1/4"
11	341-5/8"	28' 5-5/8"	82-1/4"
12	372-1/8"	31' 0-1/8"	82-1/4"
13	405-3/8"	33' 9-3/8"	82-1/4"
14	435-3/4"	36' 3-3/4"	82-1/4"
15	466-1/8"	38' 10-1/8"	82-1/4"
16	496-1/2"	41' 4-1/2"	82-1/4"
17	529-3/4"	44' 1-3/4"	82-1/4"
18	560-1/8"	46' 8-1/8"	82-1/4"
19	590-1/2"	49' 2-1/2"	82-1/4"
20	620-7/8"	51' 8-7/8"	82-1/4"
21	654-1/8"	54' 6-1/8"	82-1/4"
22	684-1/2"	57' 0-1/2"	82-1/4"
23	714-7/8"	59' 6-7/8"	82-1/4"
24	745-1/4"	62' 1-1/4"	82-1/4"
25	778-1/2"	64' 10-1/2"	82-1/4"
26	808-7/8"	67' 4-7/8"	82-1/4"
27	839-1/4"	69' 11-1/4"	82-1/4"
28	869-5/8"	72' 5-5/8"	82-1/4"
29	902-7/8"	75' 2-7/8"	82-1/4"
30	933-1/4"	77' 9-1/4"	82-1/4"

VISIT OUR WEBSITE AT

WWW.RAVESCOOLERDOORS.COM

ROUGH OPENING GUIDE

ENTRANCE GLASS DOOR ROUGH OPENINGS

(FRAME HAS A 5/8" FLANGE ON 3 SIDES, NO SILL / BASE)

DOOR SIZE	RO WIDTH (IN)	RO WIDTH (FT / IN)	RO HEIGHT (IN)
30" x 80"	32-1/8"	2' 8-1/8"	82"
36" x 80"	38"	3' 2"	82"
36" x 84"	38"	3' 2"	86"
DOUBLE DOOR 36" x 84" (x2)	76-3/4"	6' 4-3/4"	86"

BEER CAVE WINDOWS ROUGH OPENINGS

(WINDOWS HAVE A 1/2" FLANGE ON 3 SIDES, NO SILL / BASE)

WINDOW SIZE	RO WIDTH (IN)	RO WIDTH (FT / IN)	RO HEIGHT (IN)
12" x 80"	12"	1'	82"
18" x 80"	18"	1' 6"	82"
24" x 80"	24"	2'	82"
30" x 80"	30"	2' 6"	82"

24" x 73" COOLER & FREEZER DOOR ROUGH OPENINGS

(FRAMES HAVE A 5/8" FLANGE ON ALL 4 SIDES, RECOMMENDED 4" TO 6" SILL / BASE)

# OF DOORS	RO WIDTH (IN)	RO WIDTH (FT / IN)	RO HEIGHT (IN)
1	26-1/8"	2' 2-1/8"	75-1/4"
2	50-5/8"	4' 2-5/8"	75-1/4"
3	75-1/8"	6' 3-1/8"	75-1/4"
4	99-3/4"	8' 3-3/4"	75-1/4"
5	126-3/4"	10' 6-3/4"	75-1/4"
6	151-3/8"	12' 7-3/8"	75-1/4"
7	175-7/8"	14' 7-7/8"	75-1/4"
8	200-3/8"	16' 8-3/8"	75-1/4"
9	227-1/2"	18' 11-1/2"	75-1/4"
10	252"	21' 0"	75-1/4"
11	276-1/2"	23' 0-1/2"	75-1/4"
12	300-7/8"	25' 0-7/8"	75-1/4"
13	328-1/8"	27' 4-1/8"	75-1/4"
14	352-3/4"	29' 4-3/4"	75-1/4"
15	377-1/4"	31' 5-1/4"	75-1/4"

LOCAL NUMBER
248.887.0648

CALL US TOLL FREE
844.261.7252

RETROFIT GLASS DOORS

BEFORE



AFTER



- Retrofit Glass Doors are designed to be installed onto existing Open Air Cases. They reduce the required compressor load and will make your HVAC system run more efficiently.
- Designed to maximize product visibility with French style door openings and Low-E ultra clear glass.
- Eco-friendly energy free plastic frames save 68-80% on energy costs compared to open air cases.
- Hassle free quick installation; designed for all major case manufacturers.

Display Walk-In Cooler



Display Walk-In Cooler



GALLERY

Display Walk-In Cooler



Beer Cave with Windows



GLASS SPECIFICATIONS

3-Pane Tempered Glass Door




Cooler Application

Argon Filled Glass Door

Designed for an environment of 75°F or less and relative humidity of 55% or less.

Dew Point – 68°F

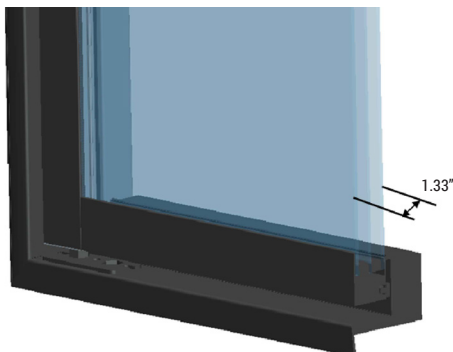

3-Pane Tempered Glass Door




Freezer Application

Heated Door Rail

Designed for an environment of 38° to 75°F and relative humidity of 55% or less.

Dew Point – 64°F

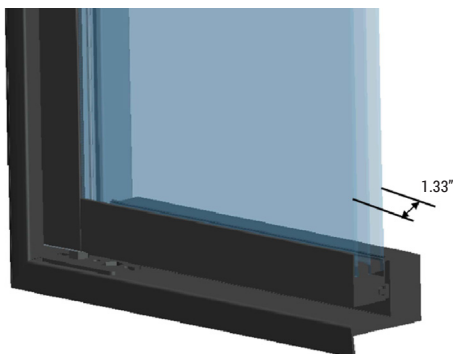

LOCAL NUMBER
248.887.0648

CALL US TOLL FREE
844.261.7252



RAVES
COOLER DOORS

PHONE: 248.887.0648

TOLL FREE: 844.261.7252

WWW.RAVESCOOLERDOORS.COM

INFO@RAVESCOOLERDOORS.COM